Table of Contents

1. Check the System version 2

1.1 LaCie Network Assistant (LNA) 2
1.2 Administration Page 2

2. Mandatory updates 3

2.1 System version 2.0.5 or 2.0.6 3
2.2 System version 2.0.7 3
2.3 System version 2.2.x (2.2.0, 2.2.3, 2.2.4 or 2.2.5) 3
2.4 LaCie Network Assistant (LNA) 3

3. Update the device from 2.0.5/2.0.6 to 2.0.7 4

3.1 Connect to the Administration Page 4
3.2 Synchronize date & time 4
3.3 Access to Update the system page 4
3.4 Update to patch 1.0.0 5
3.5 Update to patch 2.0.7 6
3.6 Confirm the updates 7

4. Update the device from 2.0.7 to 2.2.3 8

4.1 Start the update using the LNA Configuration Window 8
4.2 Update with the capsule to 2.2.3 9

5. Update the device from 2.2.x to 2.2.6 10

5.1 Update to the backend patch 10
5.2 Update to patch 2.2.6 11
5.3 Confirm the updates 12

1. Check the System version

1.1 LaCie Network Assistant (LNA)

LNA configuration window

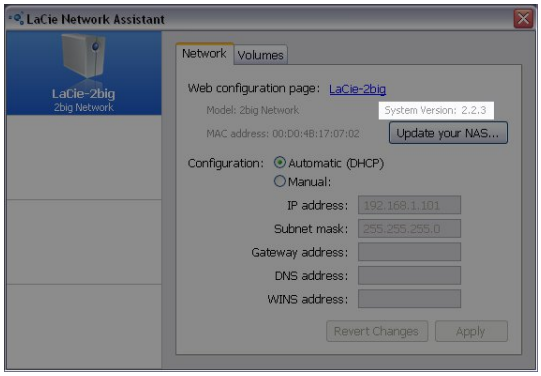

For more information about LNA please see the 2Big Network User Manual at LaCie

System version is visible on latest LNA version
Download program here

1.2 Administration Page

Administration Page

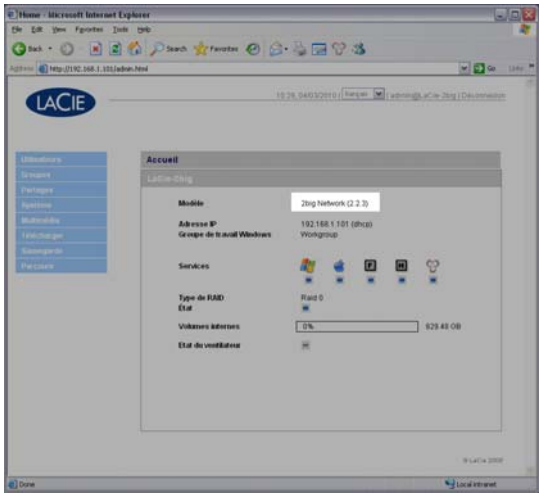

For more information on how to connect to the Administration Page, see the 2Big Network User Manual at LaCie

2. Mandatory updates

2.1 System version 2.0.5 or 2.0.6

Mandatory patches and updates:

- Patch 1.0.0 ……download the patch here
- Update to patch 2.0.7……download the patch here
- Update capsule to 2.2.3…… see how to download the capsule here
- Backend Patch…… download the patch here
- Update to patch 2.2.6……download the patch here

2.2 System version 2.0.7

Mandatory patches and updates:

- Update capsule to 2.2.3……see how to download the capsule here
- Backend Patch…… download the patch here
- Update to patch 2.2.6……download the patch here

2.3 Product System 2.2.x (2.2.0 or 2.2.3 or 2.2.4)

Mandatory patches and updates:

- Backend Patch…… download the patch here
- Update to patch 2.2.6……download the patch here

2.4 LaCie Network Assistant (LNA)

Download the latest version of LaCie Network Assistant (LNA) here

3. Update the device from 2.0.5/2.0.6 to 2.0.7

3.1 Connect to the Administration Page

Select **System**

For more information on how to connect to the Administration Page, see the 2Big Network User Manual at LaCie

3.2 Synchronize date & time

Click **Synchronize** (a)

Select **Apply** for the change to take effect (b)

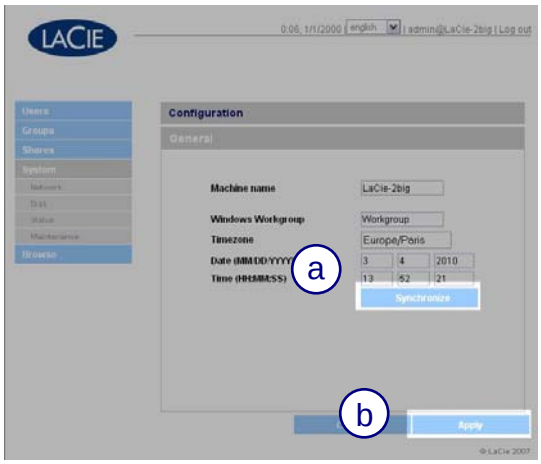

Some update cannot be applied if date is incorrect

3.3 Access to the Update the system page

Select **Maintenance**

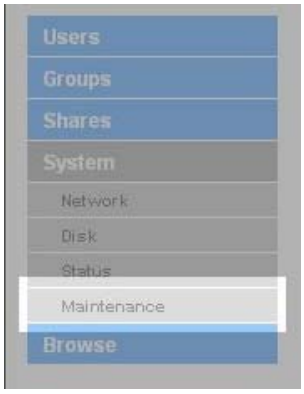

Select **Update the system**

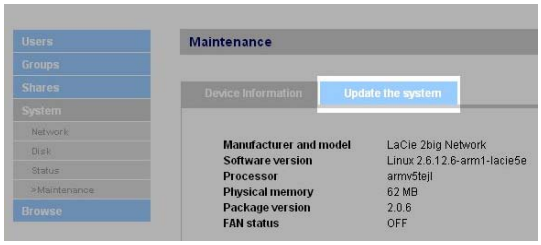

3.4 Update to patch 1.0.0

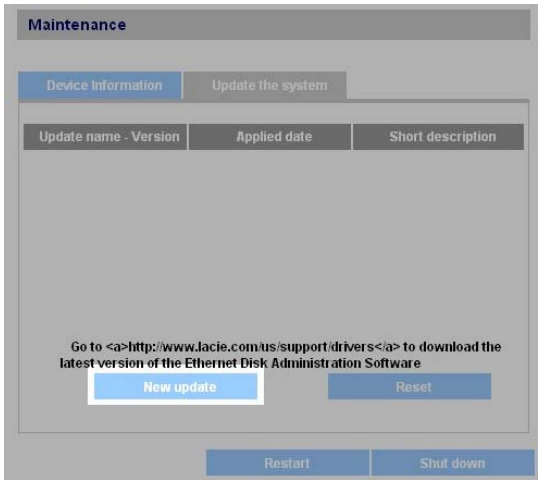

Click **New update**

Before starting the update:
- Stop all data transfers from the device
- Disconnect all shares mounted on computers
- Turn off all other network devices

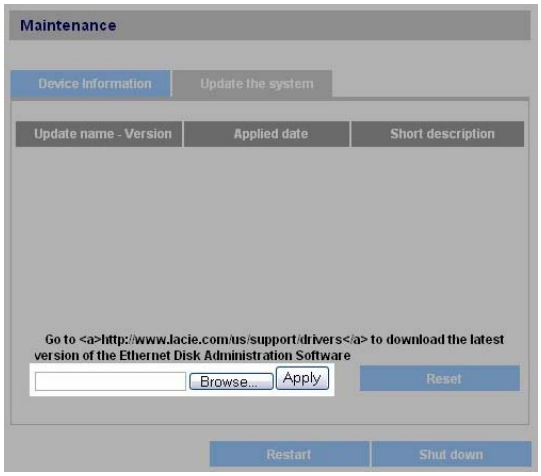

Browse your computer for the patch file:
2Big Network Patch 1.0.0.signed

Click **Apply**

Download the patch here

Unzip the patch before running the update

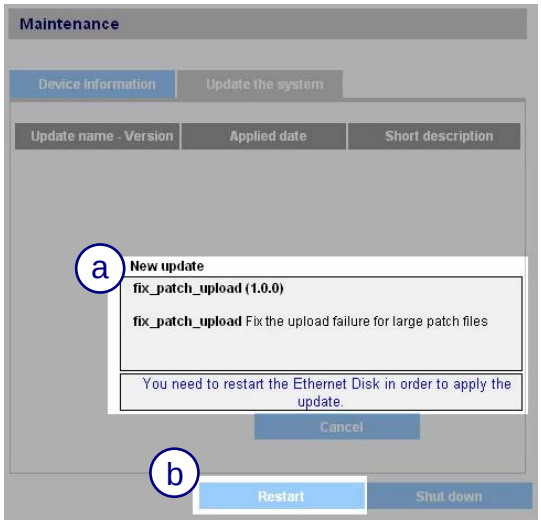

Please wait for the message instructing you to restart the device. (a)

Click **Restart** (b)

The device will restart

You may have to return to **Update the system** page to see the message instructing you to restart the device

3.5 Apply the 2.0.7 update patch

Go to the **Update the system** page

Click **New update**

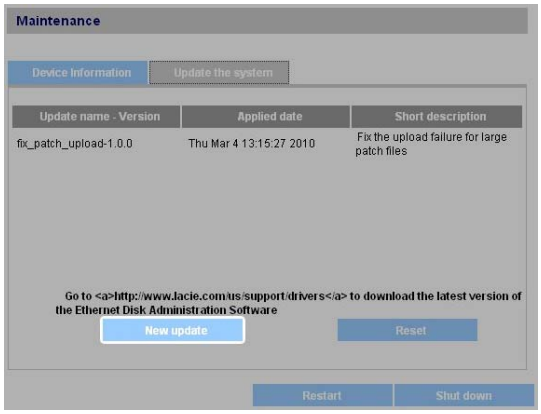

See **3.3 Access to the Update the system page** for further information on accessing the page

The 2.0.7 update patch cannot be applied before patch 1.0.0

Browse your computer for the patch file: 2Big Network Update 2.0.7.signed

Click **Apply**

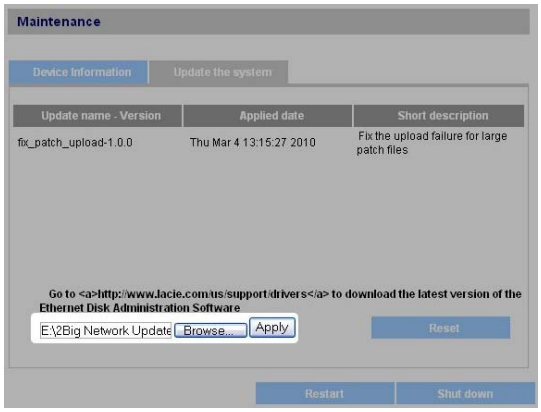

Download the patch here

Unzip the patch before running the update

Please wait for the message instructing you to restart the device. (a)

Click **Restart** (b)

The device will restart

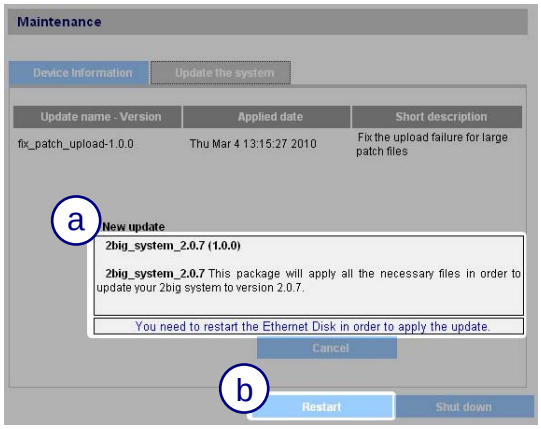

You may have to return to **Update the system** page to see the message instructing you to restart the device

3.6 Confirm the updates

Go to the **Home** section of the Administration Page to confirm the current version of firmware

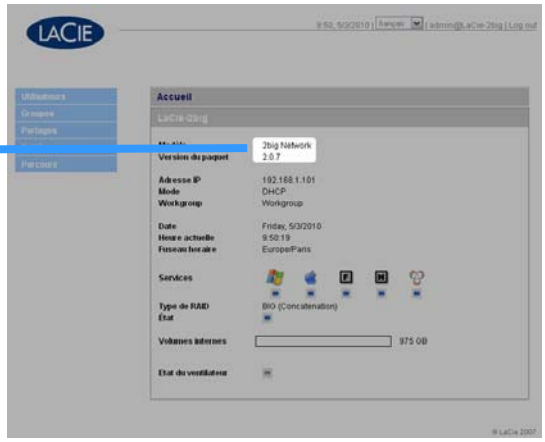

For more information on how to connect to the Administration Page, see the 2Big Network User Manual at LaCie

Go to the **Update the system** page

Confirm that both updates are listed

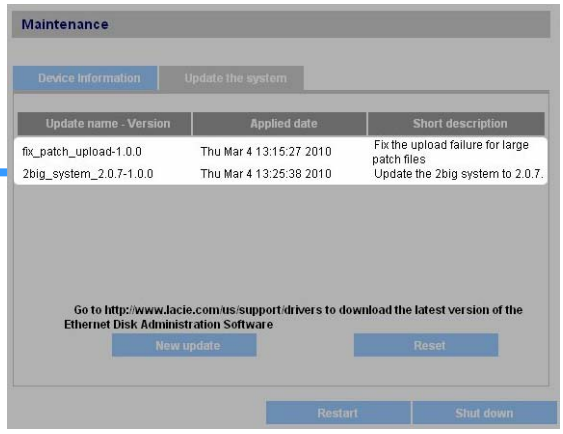

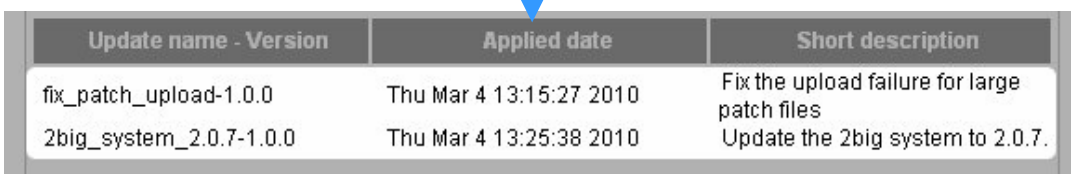

See **3.3 Access to the Update the system page** for further information on accessing the page

4. Update the device from 2.0.7 to 2.2.3

4.1 Start the update using the LNA configuration window

Go to the LNA configuration window

Click **Update your NAS…**

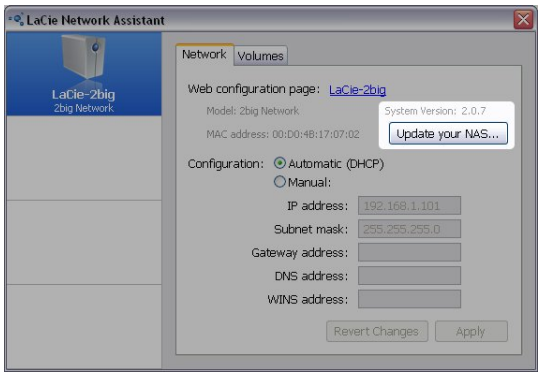

For more information about LNA please see the 2Big Network User Manual at LaCie

Before starting the update:
- Stop all data transfers from the device
- Disconnect all shares mounted on computers
- Turn off all other network devices
- Install the latest LNA version
- Disable IPConf support in the LNA Preferences

Enter your Administrator login and password (a)

Click **OK** (b)

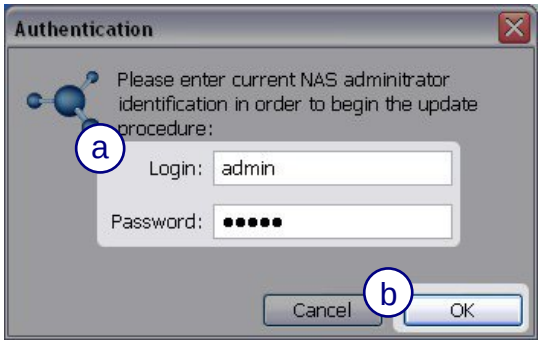

4.2 Update with the capsule to 2.2.3

Browse your computer for the capsule file:
2Big Network Update Capsule from 2.0.7 to 2.2.3

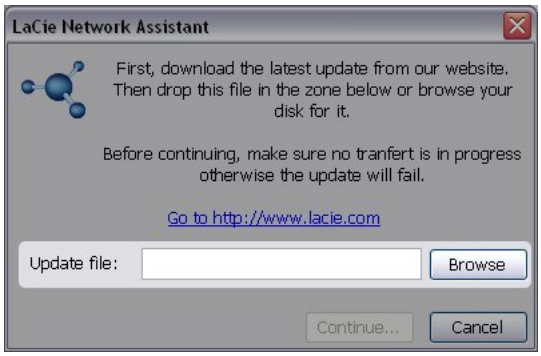
LaCie Network Assistant
First, download the latest update from our website. Then drop this file in the zone below or browse your disk for it.
Before continuing, make sure no tranfert is in progress otherwise the update will fail.
Go to http://www.lacie.com
Update file:
Browse
Continue...
Cancel

See how to download Update Capsule here

The update window displays the future version 2.2.3 (a)

Click **Continue…** (b)

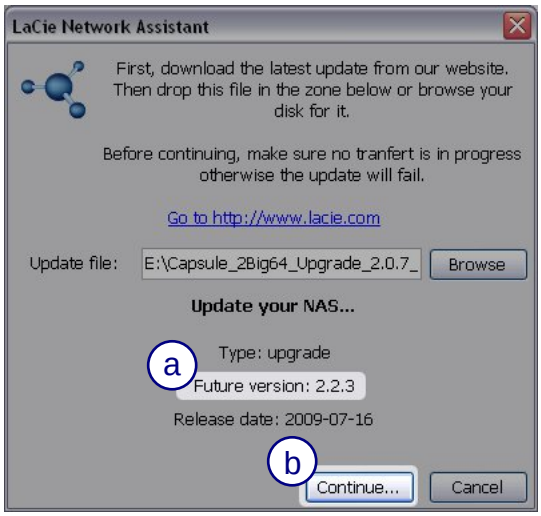
LaCie Network Assistant
First, download the latest update from our website. Then drop this file in the zone below or browse your disk for it.
Before continuing, make sure no tranfert is in progress otherwise the update will fail.
Go to http://www.lacie.com
Update file:
E:\Capsule_2Big64_Upgrade_2.0.7_
Browse
Update your NAS...
a
Type: upgrade
Future version: 2.2.3
Release date: 2009-07-16
b
Continue...
Cancel

The Updater offers three notification windows (a) (b) (c)

Wait for the **Update completed** pop up window, then click **OK** (d)

LaCie Network Assistant - Updater
Your device is being updated. Do not turn off neither your computer nor your device.
(step 1 of 3) NAS disappeared
a

LaCie Network Assistant - Updater
Your device is being updated. Do not turn off neither your computer nor your device.
(step 2 of 3) Updating...
b

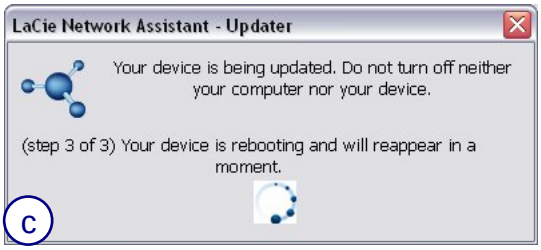
LaCie Network Assistant - Updater
Your device is being updated. Do not turn off neither your computer nor your device.
(step 3 of 3) Your device is rebooting and will reappear in a moment.
c

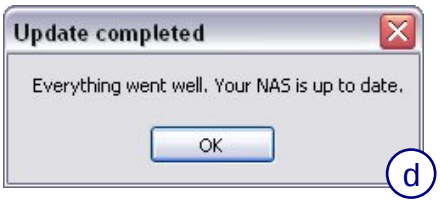

5. Update the device from 2.2.x to 2.2.6

5.1 Update to the backend patch

Go to the **Update the system** page

Click **New update**

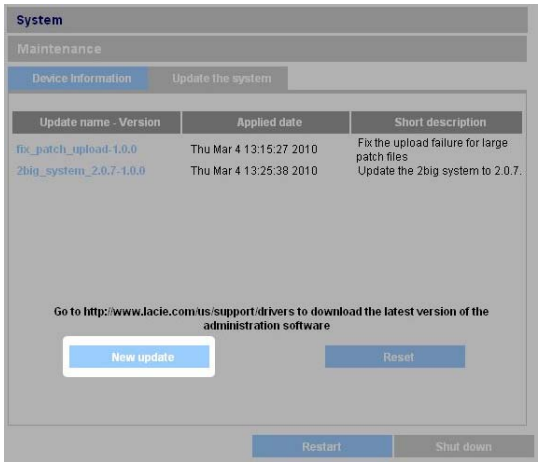

See **3.3 Access to the Update the system page** for further information on accessing the page

Before starting the update:
- Stop all data transfers from the device
- Disconnect all shares mounted on computers
- Turn off all other network devices

Browse your computer for the patch file:
2Big Network Backend Update.signed

Click **Apply**

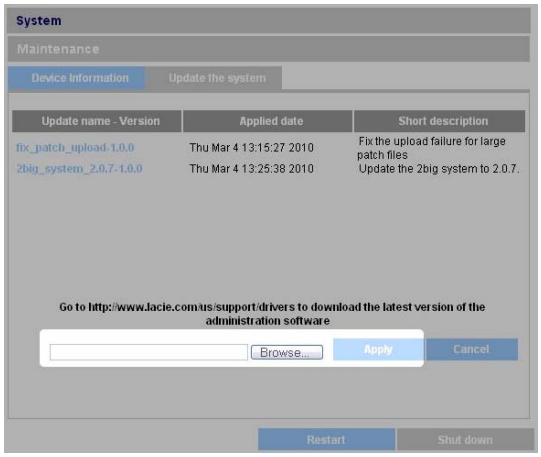

Download the patch here

Unzip the patch before running the update

Please wait for the message instructing you to restart the device. (a)

Click **Restart** (b)

The device will restart

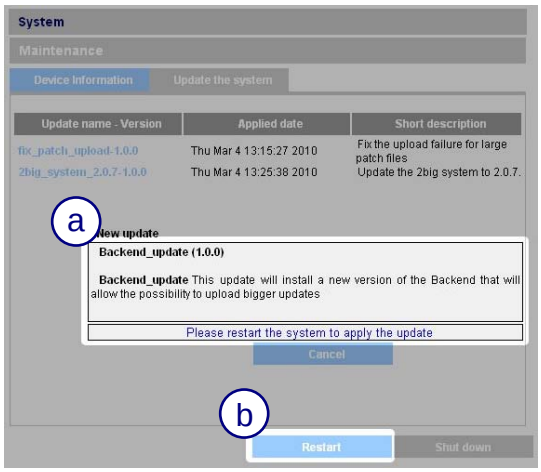

You may have to return to **Update the system** page to see the message instructing you to restart the device

5.2 Update to patch 2.2.6

Go to the **Update the system** page

Click **New update**

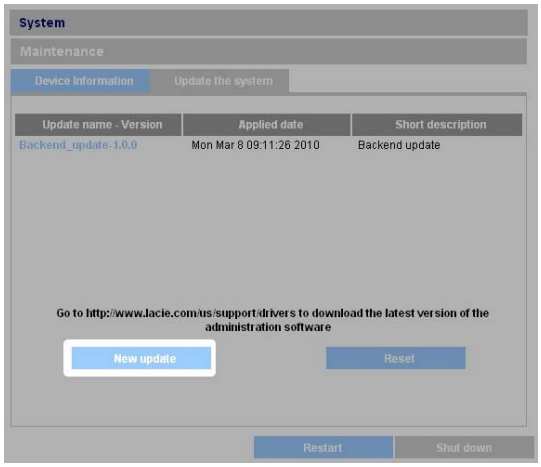

See **3.3 Access to the Update the system page** for further information on accessing the page

The 2.0.7 update patch cannot be applied before patch 1.0.0

Browse your computer for the patch file:
2Big Network Update 2.2.6.signed

Click **Apply**

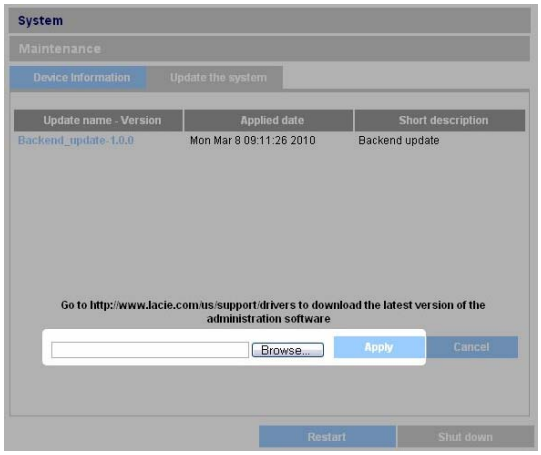

Download the patch here

Unzip the patch before running the update

Please wait for the message instructing you to restart the device. (a)

Click **Restart** (b)

The device will restart

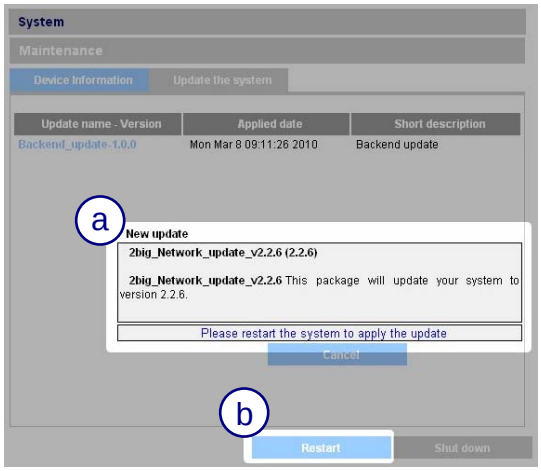

You may have to return to **Update the system** page to see the message instructing you to restart the device

5.3 Confirm the updates

Go to the **Home** section of the Administration Page to confirm the current version of firmware

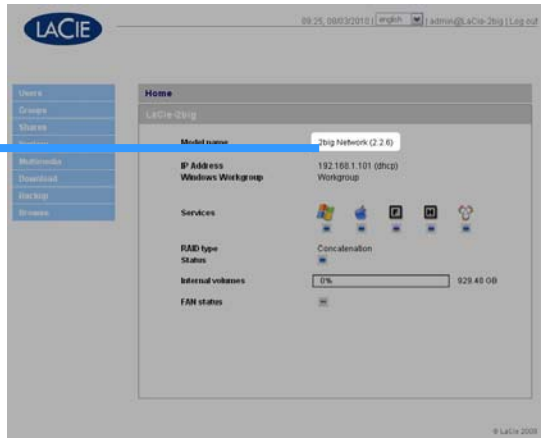

For more information on how to connect to the Administration Page, see the 2Big Network User Manual at LaCie

Go to the **Update the system** page

Confirm that both updates are listed

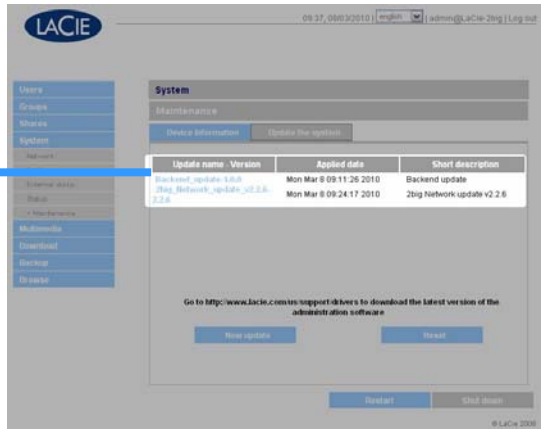

See **3.3 Access to the Update the system page** for further information on accessing the page

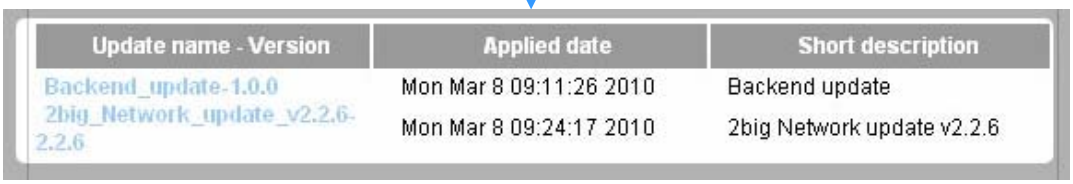

Update name - Version	Applied date	Short description
Backend_update-1.0.0	Mon Mar 8 09:11:26 2010	Backend update
2big_Network_update_v2.2.6-2.2.6	Mon Mar 8 09:24:17 2010	2big Network update v2.2.6